

PRODUCT INFORMATION/ TECHNICAL DATASHEET

VersaLite Stone® FABRIC

Real Stone overlay (Slate and Quartzite) with fabric backing.

VersaLite Stone® Fabric is real stone texture, grain, color, and appearance in an incredibly thin veneer with reinforced cotton fabric for complete strength and flexibility of the sheet.


SIZES: Standard Size is 36" x 96" (special sizes are also available on request).

THICKNESS:

0.7 - 1.0 mm (depending upon the stone).

WEIGHT:

900-1100 grams per square meter or .18 - .25 lbs. SF (depending upon the stone).

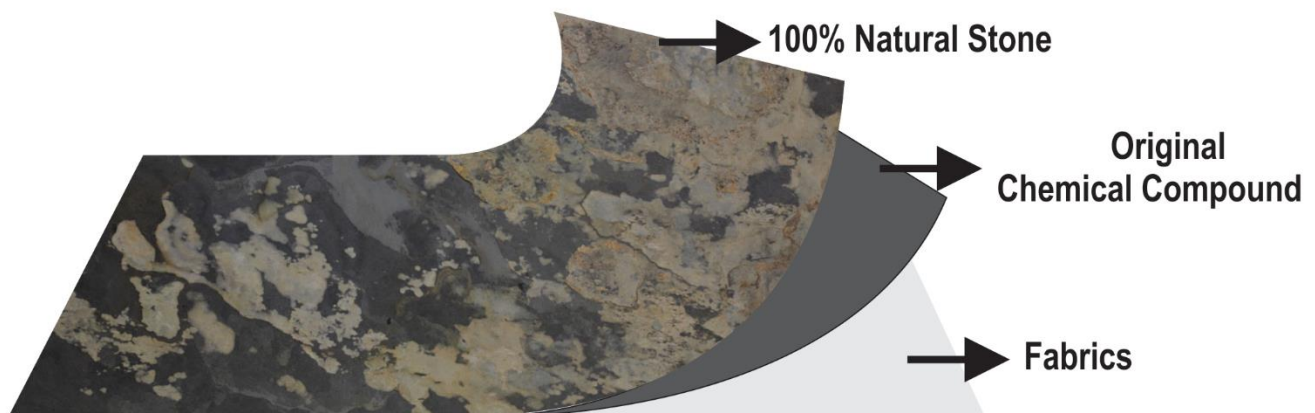

COMPOSITION:

VersaLite Stone® Fabric is natural stone veneer laminated to a fabric substrate.

APPLICATION:

VersaLite Stone® Fabric offers an even wider range of opportunities in use because of its extreme flexibility and uniqueness. The material can be applied on various substrates: Walls, Ceilings, Interiors, Furniture, Cabinets, Doors, etc. (Not suitable for floors or exterior use)

TOOLS:

Standard tools can be used for application. Fabric can also cut with a carpet knife or sharp scissors.

SEALING:

VersaLite Stone® Fabric requires sealing for stain and scratch protection. The sealers recommended are listed on this document. It is best to pre-seal VersaLite Stone® Fabric sheets prior to installation. This protects and seals the face from scuffing, adhesives and grout during installation and handling.

VARIATIONS:

Since VersaLite Stone® Fabric is a natural product *DESIGNED BY NATURE*, color and texture variances are not defects within the material, but are inherent to it and part of the natural beauty of quarried materials. These materials cannot be guaranteed to match dye-lot to dye-lot, so it is recommended that orders take into account future maintenance or re-fit possibilities.

STORAGE:

VersaLite Stone® Fabric sheets should be stored flat in a clean environment.

PRECAUTIONS:

Precautions must be taken when working with VersaLite Stone® Fabric due to the fiberglass composition of the backing materials. ALWAYS use the proper gloves, goggles, and dust mask when working with VersaLite Stone® Fabric. Industry standards recommend a NIOSH/MSHA approved respirator for this type of material. When using a saw ALWAYS be sure to take proper precautions to cover skin and eyes from fiberglass dust. When cutting VersaLite Stone® Fabric with saws, grinders, or sanders, ALWAYS properly filter and exhaust equipment.

AVOID BREATHING SILICA DUST. This product when cut, drilled, or abraded produces dust containing Free Silica which may cause cancer or delayed lung injury (Silicosis) if inhaled. Work outdoors, in a well ventilated area, or use mechanical ventilation. Please wear safety glasses and a dust mask. If working in dusty areas or where airborne dust exceeds PEL wear NIOSH/MSHA approved respirators. This product contains one or more chemicals known to the State of California to cause cancer.

FIRST AID MEASURES:

	(Under normal condition)
Inhalation:	no specific measure to be taken
Skin Contact:	no specific measure to be taken
Eye Contact:	no specific measure to be taken
Ingestion:	no specific measure to be taken

MEASURES IN CASE OF FIRE:

Suitable extinguishing media: dry extinguishing media, foam, CO², water spray risk by gas: in case of fire carbon monoxide and carbon dioxide can be produced special protecting equipment: no special measurements necessary.

MEASURES IN CASE OF ACCIDENTAL SPILLAGE:

Not applicable

EXPOSITION RESTRICTION AND PERSONAL PROTECTING EQUIPMENT:

No specific measures – while processing the material we recommend wearing safety glasses

CHEMICAL AND PHYSICAL PROPERTIES:

Appearance:	solid (color of the product as supplied)
PH:	not applicable
Boiling Point:	not applicable
Melting Point:	not applicable
Decomposition Temperature:	> 300°C
Flash Point:	not applicable
Flammability:	not easily flammable
Explosive Properties:	not applicable
Oxidizing Properties:	not applicable
Vapor Pressure:	not applicable
Relative Density:	not applicable
Solubility in Water:	insoluble

TOXICOLOGICAL INFORMATION:

No toxic reaction known under normal conditions.

ECOLOGICAL INFORMATION:

For transportation, storage, normal use, no toxicological effect known.

DISPOSAL CONSIDERATIONS

Product can be deposited with normal waste according to local restrictions.

TRANSPORT INFORMATION:

Fabric sheets are packed into wooden pallet, roll or box and can be transported by LTL, Air or Sea.

Adhesives for VersaLite Stone® Fabric Installations									
	Drywall	Painted Surfaces	MDF	Doors and Cabinetry	Concrete and Backerboard	Ceramic	Wood	Metal	Fiberglass
Dry Interior	Q / X / L	Q / X / L	Q / X / L	Q / X / L	N-A	N-A	Q / X / L	X / L	X / L
Q = Construction Adhesive: Boss 635 Contact Adhesive (Spray) or Boss 165 Multi-Seal* (Cartridge) (*one surface must be porous) X = X90 Epoxy Litokol L = Litoelastic Epoxy/Polyurethane Litokol N-A = Not Applicable or Not Recommended									
Sealers for VersaLite Stone® Fabric									
Tile Doctor Natural Sealer, Solvent Based Sealer for Large Projects: Gallon									Gallon
Tile Doctor Advanced Hydro Protect, Premium Water Based Sealer: Pint / Quart / Gallon									Pint/ Quart / Gallon
Tile Doctor Advanced Hybrid Sealer, Penetrating Sealer No-Gloss: Pint/Quart									Pint/ Quart/Gallon
Tile Doctor Advanced Green Enhance and Protect, Semi- Gloss Enhancer Pint / Quart / Gallon									Pint / Quart / Gallon
Cleaners									
Tile Doctor Advanced Tile and Stone Cleaner, PH Neutral Cleaner Concentrate									Quart/ Gallon

Visit TileDoctor.com for more information on sealers and adhesives.



VersaLite Stone®

LIMITED WARRANTY

VersaLite Stone® products are warranted to be free from defects in materials and workmanship at the time of shipment. Installation constitutes acceptance of the product. Any such defects must be reported within ten (10) days of date of delivery. During this warranty period we will repair, or at our option, replace free of charge, such merchandise as shall prove to be defective. THIS WARRANTY DOES NOT APPLY TO DAMAGE RESULTING FROM ACCIDENT, ALTERATION, MISUSE, TAMPERING, NEGLIGENCE, OR ABUSE. INCIDENTAL AND CONSEQUENTIAL DAMAGES ARE SPECIFICALLY DISCLAIMED. ALL OTHER WARRANTIES (INCLUDING ANY WARRANTY OF MERCHANTABILITY OF FITNESS FOR ANY PARTICULAR PURPOSE) ARE HEREBY EXCLUDED. THE FOREGOING SHALL CONSTITUTE THE SOLE REMEDY OF THE CUSTOMER.

Concrete and masonry substrates must be at least 28 days old. Hydrostatic pressure conditions and vapor transmission cannot exceed 3 lbs. per 1,000 sq. ft. (1,36 kg per 92,9 m²) per 24 hours using a calcium chloride test (reference ASTM). NOTICE: Before using, user shall determine the suitability of the product for its intended use and user alone assumes all risks and liability whatsoever in connection therewith. ANY CLAIM SHALL BE DEEMED WAIVED UNLESS MADE IN WRITING TO US WITHIN TEN (10) DAYS FROM DATE IT WAS, OR SHOULD HAVE BEEN DISCOVERED.

The Tile Doctor
1395 South Marietta Pkwy SE
Bldg. 200, Suite 222
Marietta, GA 30067
770-447-0061
Toll-Free: 877-TileDoc
Visit us on the web at: www.TileDoctor.com

